



612GX4

Datasheet

Aiming to create better and safer working environments and life experiences through the products we deliver.



AVCOMM Technologies, Inc

www.avcomm.us

Email: info@avcomm.us

Phone: (713) 933-4534

Address: 333 West Loop North, Suite 460
Houston, TX 77024
United States

Reliable Plug and Play Industrial Ethernet Switch for Automation and Electrical OEM

612GX4

Industrial Management Switch

AVCOMM 612GX4 is managed Industrial Ethernet Switch which provide eight 10/100baseTX ports, four 1000Base-X ports and one console port. It supports CLI management and Ethernet layer-2 protocol to ensure the stability of the data transmission. Fanless design with low power consumption and high anti-EMI capability enable the stable operation in harsh industrial environments. AVCOMM 612GX4 supports DIN Rail-mounted to facilitate in various industrial network applications.



Features & Benefits

Fast Ethernet Switching

- Eight(8) 10 /100BaseTX RJ-45 ports and four(4) 1000Base-X ports(SC ST SFP optional)
- 8K MAC address table
- Store and forwarding with non-blocking technology

IEEE 802.3u EEE Power Management

- Ultra power consumption efficiency, 15 W fully loaded
- Energy Efficient Ethernet for low power requirement
- Idle power saving mode for energy efficiency

Rugged Mechanical Design

- Robust design protects from mechanical deformation
- IP40 industrial rating to withstand harsh environments
- Wide operating temperature range -40°C ~ +85°C
- IEC61000-6-2 /IEC61000-6-4 heavy industry EMS standards

Power protection

- Provide overload protection
- Provide reverse connection protection




Order Information

Model Name	Description
612GX4-SC	12-Port Fully Managed Industrial Ethernet Switch, 8 RJ45 10/100BaseT(X), 4 1000Base-X (Multimode, SC style connector) , DIN-Rail, Dual Power Input 10-50VDC, -40°C to +85°C
612GX4-ST	12-Port Fully Managed Industrial Ethernet Switch, 8 RJ45 10/100BaseT(X), 4 1000Base-X (Multimode, ST style connector) , DIN-Rail, Dual Power Input 10-50VDC, -40°C to +85°C
612GX4-SFP	12-Port Fully Managed Industrial Ethernet Switch, 8 RJ45 10/100BaseT(X), 4 1000Base-X (SFP) , DIN-Rail, Dual Power Input 10-50VDC, -40°C to +85°C

 Specifications

Technology	
Standard	IEEE802.3, IEEE802.3u, IEEE802.3x, IEEE802.3z, IEEE802.3ab, IEEE802.1Q, IEEE802.1p, IEEE802.1D, IEEE802.1W, IEEE802.1x
Performance	
Switch Technology	Store and Forwarding Technology
Number of MAC Address	8K
Packet Buffer Memory	3 MB
Backplane bandwidth	9.6 Gbps
Forwarding rate	148810pps/1488095pps
Interface	
Ethernet Port	8 x 10/100BaseT(x)RJ-45, auto-MDI/MDI-X, 4 x 1000Base-X
System LED	2 x Power: Green On, 1 x DO Alarm: Red on, 1 x Run: Green On
Ethernet Port LED	Link (Green On), Active (Green Blinking)
Power Input	Pluggable 8-pin terminals (V-/N, V+/L, V-/N, V+/L)
Power Requirement	
Input Voltage	12/24/48VDC(10.8~52.8VDC), Redundant
Reverse Polarity Protect	Yes
Power Consumption	625mA@24V
Mechanical	
Enclosure Material	Metal
Dimension	150 mm x 120 mm x 70 mm (W x H x D) without DIN Rail Clip
Ingress Protection	IP40
Weight	≤1700g
Installation method	DIN Rail-mounted
Environmental	
Operating Temperature & Humidity	-40°C ~ +85°C , 0%~+95% Non- Condensing
Storage Temperature	-40°C ~ +85°C
MTBF	>2,000,000 hours
Warranty	5 years
Standard	
EMI	FCC Part 15, CISPR (EN55022) class AEMS
EMS	IEC(EN)61000-4-2(ESD) IEC(EN)61000-4-3(RS) IEC(EN)61000-4-4(EFT) IEC(EN)61000-4-5(Surge) IEC(EN)61000-4-6(CS) IEC(EN)61000-4-8 IEC 60068-2-27(Shock) IEC 60068-2-32(Freefall)

Function interface

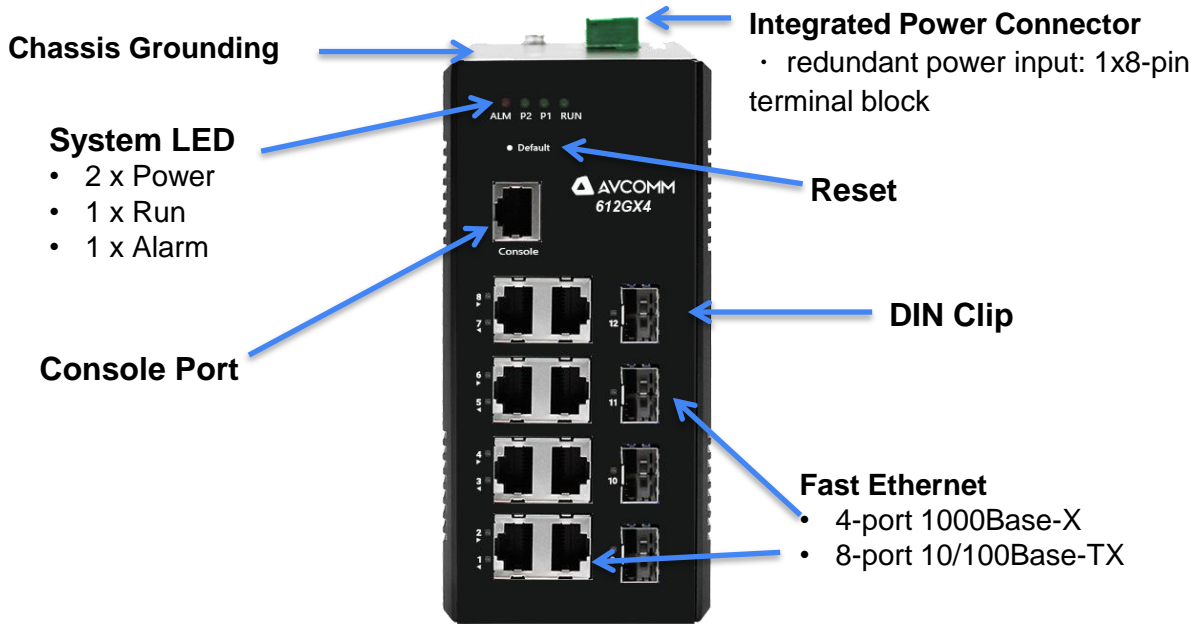

Installation dimensions

