



AVCOMM®

# 4008TX-AC

## Datasheet

Aiming to create better and safer working environments and life experiences through the products we deliver.



AVCOMM Technologies, Inc

[www.avcomm.us](http://www.avcomm.us)

Email: [info@avcomm.us](mailto:info@avcomm.us)

Phone: (713) 933-4534

Address: 333 West Loop North, Suite 460  
Houston, TX 77024  
United States

## Reliable Plug and Play Industrial Ethernet Switch for Automation and Electrical OEM

### 4008TX-AC

#### Industrial Unmanaged Ethernet Switch

AVCOMM 4008TX-AC is 8-port 10/100/1000Base-TX RJ-45 unmanaged Ethernet switch with reverse polarity protection of AC or DC input. It is highly scalable and can transmit data over long distances through fiber-optic ports. It has wide operation temperature range, high anti-EMI capability to ensure stable work in harsh industrial environments and supports DIN Rail-mounted/wall-mounted to facilitate in various industrial network applications.



#### Features & Benefits

##### Fast Ethernet Switching

- Eight (8) 10/100/1000BaseT(X) RJ-45 ports
- 4K MAC address table
- Store and forwarding with non-blocking technology

##### IEEE 802.3u EEE Power Management

- Ultra power consumption efficiency, 6 W fully loaded
- Energy Efficient Ethernet for low power requirement
- Idle power saving mode for energy efficiency

##### Rugged Mechanical Design

- Robust design protects from mechanical deformation
- IP40 industrial rating to withstand harsh environments
- Wide operating temperature range -40°C ~ +85°C

##### Power protection

- Provide overload protection
- Provide reverse connection protection
- Provide multiple power input options, AC or HVDC


#### Ordering Information

Model Name	Description
4008TX-AC	8-Port Industrial Unmanaged Ethernet Switch, 8 RJ45 10/100/1000BaseT(X), DIN-Rail, Dual Power Input 88-264VAC, -40°C to +85°C
4008TX-HV	8-Port Industrial Unmanaged Ethernet Switch, 8 RJ45 10/100/1000BaseT(X), DIN-Rail, Dual Power Input 88-264VDC, -40°C to +85°C

 Specifications

Technology	
Standard	IEEE 802.3, IEEE 802.3u, IEEE 802.3z, IEEE 802.3ab, IEEE 802.3x
Performance	
Switch Technology	Store and Forwarding Technology with non-blocking
Number of MAC Address	4K
Packet Buffer Memory	1.5 MB
Backplane bandwidth	18 Gbps
Forwarding rate	1488095pps
Interface	
Ethernet Port	8 x 10/100/1000BaseT(x)RJ-45,auto-MDI/MDI-X
System LED	2 x Power: Green On; 1 x DO Alarm: Red On
Ethernet Port LED	Link (Green On), Active (Green Blinking)
Power Input	6-Pin Removable Terminal Connector
Power Requirement	
Input Voltage	110/220VAC(88~264VAC) or 110/220VDC(88~264VDC) , Redundant
Reverse Polarity Protect	Yes
Power Consumption	10 W
Mechanical	
Enclosure Material	Metal
Dimension	47.6 mm x 150 mm x 100 mm (W x H x D) without DIN Rail Clip
Ingress Protection	IP40
Weight	800g
Installation method	DIN Rail-mounted/wall-mounted
Environmental	
Operating Temperature & Humidity	-40°C ~ +85°C , 0%~95% Non- Condensing
Storage Temperature	-40°C ~ +85°C
MTBF	>2,000,000 hours
Warranty	5 years
Standard	
EMI	FCC Part 15 Subpart B class A, EN55022 class A
EMS	IEC(EN)61000-4-2(ESD) IEC(EN)61000-4-3(RS) IEC(EN)61000-4-4(EFT) IEC(EN)61000-4-5(Surge) IEC(EN)61000-4-6(CS) IEC(EN)61000-4-8 IEC 60068-2-27(Shock) IEC 60068-2-32(Freefall) IEC 60068-2-6(Vibration)

## Function interface

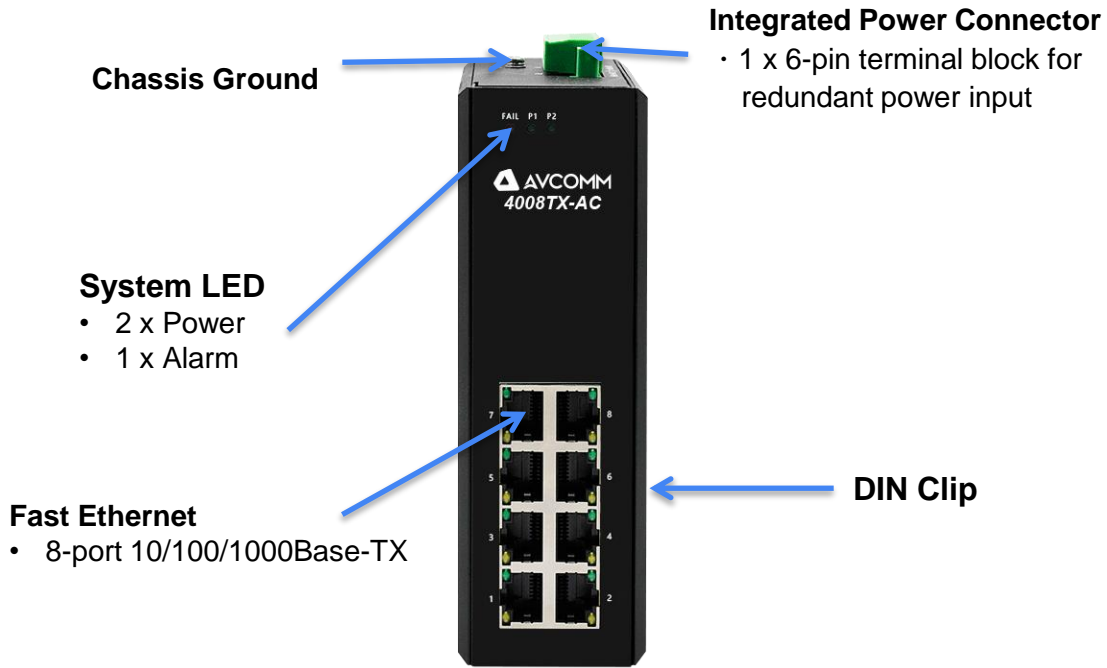

## Installation dimensions

