



405FX

Datasheet

Aiming to create better and safer working environments and life experiences through the products we deliver.



AVCOMM Technologies, Inc

www.avcomm.us

Email: info@avcomm.us

Phone: (713) 933-4534

Address: 333 West Loop North, Suite 460
Houston, TX 77024
United States

Reliable Plug and Play Industrial Ethernet Switch for Automation and Electrical OEM

405FX

Industrial Unmanaged Ethernet Switch

AVCOMM 405FX is a 5-port plug and play fast unmanaged Ethernet switch with reverse polarity protection of AC or DC input for automation and electrical OEM purpose. It has wide operation temperature range, high EMC performance to ensure stable work in harsh industrial environments and supports DIN Rail-mounted/wall-mounted to facilitate in various industrial network applications. AVCOMM 405FX is suitable for industrial applications such as industrial automation, intelligent transportation, video surveillance, and electrical OEMs.



Features & Benefits

Fast Ethernet Switching

- Four(4) 10/100BaseT(X) RJ-45 ports and one(1) 100BaseFX port (SC ST FC optional)
- 1K MAC address table
- Store and forwarding with non-blocking technology

IEEE 802.3u EEE Power Management

- Ultra power consumption efficiency, 4.8W fully loaded
- Energy Efficient Ethernet for low power requirement
- Idle power saving mode for energy efficiency

Rugged Mechanical Design

- Robust design protects from mechanical deformation
- IP40 industrial rating to withstand harsh environments
- Wide operating temperature range -40°C ~ 85°C
- IEC61000-6-2/IEC61000-6-4 heavy industrial EMS

Power protection

- Provide overload protection
- Provide reverse connection protection
- Provide multiple power input options, AC or DC or HV

Ordering Information

Model Name	Description
405FX	5-Port Industrial Unmanaged Ethernet Switch, 4 RJ45 10/100BaseT(X), 1 100BaseFX , DIN-Rail, Single Power Input 10-50VDC, -40°C to +85°C
405FX-SC	5-Port Industrial Unmanaged Ethernet Switch, 4 RJ45 10/100BaseT(X), 1 100BaseFX (Multimode, SC style connector) , DIN-Rail, Single Power Input 10-50VDC, -40°C to +85°C
405FX-ST	5-Port Industrial Unmanaged Ethernet Switch, 4 RJ45 10/100BaseT(X), 1 100BaseFX (Multimode, ST style connector) , DIN-Rail, Single Power Input 10-50VDC, -40°C to +85°C


Ordering Information

Model Name	Description
405FXE-SC-15	5-Port Industrial Unmanaged Ethernet Switch, 5 RJ45 10/100BaseT(X), 1 100BaseFX (Singlemode, SC style connector, 15Km) , DIN-Rail, Single Power Input 10-50VDC, -40°C to +85°C
405FXE-ST-15	5-Port Industrial Unmanaged Ethernet Switch, 4 RJ45 10/100BaseT(X), 1 100BaseFX (Singlemode, ST style connector, 15Km) , DIN-Rail, Single Power Input 10-50VDC, -40°C to +85°C
405FXE-SC-40	5-Port Industrial Unmanaged Ethernet Switch, 4 RJ45 10/100BaseT(X), 1 100BaseFX (Singlemode, SC style connector, 40Km) , DIN-Rail, Single Power Input 10-50VDC, -40°C to +85°C
405FXE-ST-40	5-Port Industrial Unmanaged Ethernet Switch, 4 RJ45 10/100BaseT(X), 1 100BaseFX (Singlemode, ST style connector, 40Km) , DIN-Rail, Single Power Input 10-50VDC, -40°C to +85°C
405FXE-SC-100	5-Port Industrial Unmanaged Ethernet Switch, 4 RJ45 10/100BaseT(X), 1 100BaseFX (Singlemode, SC style connector, 100Km) , DIN-Rail, Single Power Input 10-50VDC, -40°C to +85°C
405FXE-ST-100	5-Port Industrial Unmanaged Ethernet Switch, 4 RJ45 10/100BaseT(X), 1 100BaseFX (Singlemode, ST style connector, 100Km) , DIN-Rail, Single Power Input 10-50VDC, -40°C to +85°C
405FX-SC-AC	5-Port Industrial Unmanaged Ethernet Switch, 4 RJ45 10/100BaseT(X), 1 100BaseFX (Multimode, SC style connector) , DIN-Rail, Dual Power Input 90-264VAC, -40°C to +85°C
405FX-ST-AC	5-Port Industrial Unmanaged Ethernet Switch, 4 RJ45 10/100BaseT(X), 1 100BaseFX (Multimode, ST style connector) , DIN-Rail, Dual Power Input 90-264VAC, -40°C to +85°C
405FXE-SC-15-AC	5-Port Industrial Unmanaged Ethernet Switch, 4 RJ45 10/100BaseT(X), 1 100BaseFX (Singlemode, SC style connector, 15Km) , DIN-Rail, Dual Power Input 90-264VAC, -40°C to +85°C
405FXE-ST-15-AC	5-Port Industrial Unmanaged Ethernet Switch, 4 RJ45 10/100BaseT(X), 1 100BaseFX (Singlemode, ST style connector, 15Km) , DIN-Rail, Dual Power Input 90-264VAC, -40°C to +85°C
405FXE-SC-40-AC	5-Port Industrial Unmanaged Ethernet Switch, 4 RJ45 10/100BaseT(X), 1 100BaseFX (Singlemode, SC style connector, 40Km) , DIN-Rail, Dual Power Input 90-264VAC, -40°C to +85°C
405FXE-ST-40-AC	5-Port Industrial Unmanaged Ethernet Switch, 4 RJ45 10/100BaseT(X), 1 100BaseFX (Singlemode, ST style connector, 40Km) , DIN-Rail, Dual Power Input 90-264VAC, -40°C to +85°C
405FXE-SC-100-AC	5-Port Industrial Unmanaged Ethernet Switch, 4 RJ45 10/100BaseT(X), 1 100BaseFX (Singlemode, SC style connector, 100Km) , DIN-Rail, Dual Power Input 90-264VAC, -40°C to +85°C
405FXE-ST-100-AC	5-Port Industrial Unmanaged Ethernet Switch, 4 RJ45 10/100BaseT(X), 1 100BaseFX (Singlemode, ST style connector, 100Km) , DIN-Rail, Dual Power Input 90-264VAC, -40°C to +85°C
405FX-SC-HV	5-Port Industrial Unmanaged Ethernet Switch, 4 RJ45 10/100BaseT(X), 1 100BaseFX (Multimode, SC style connector) , DIN-Rail, Dual Power Input 90-264VDC, -40°C to +85°C
405FX-ST-HV	5-Port Industrial Unmanaged Ethernet Switch, 4 RJ45 10/100BaseT(X), 1 100BaseFX (Multimode, ST style connector) , DIN-Rail, Dual Power Input 90-264VDC, -40°C to +85°C
405FXE-SC-15-HV	5-Port Industrial Unmanaged Ethernet Switch, 4 RJ45 10/100BaseT(X), 1 100BaseFX (Singlemode, SC style connector, 15Km) , DIN-Rail, Dual Power Input 90-264VDC, -40°C to +85°C
405FXE-ST-15-HV	5-Port Industrial Unmanaged Ethernet Switch, 4 RJ45 10/100BaseT(X), 1 100BaseFX (Singlemode, ST style connector, 15Km) , DIN-Rail, Dual Power Input 90-264VDC, -40°C to +85°C
405FXE-SC-40-HV	5-Port Industrial Unmanaged Ethernet Switch, 4 RJ45 10/100BaseT(X), 1 100BaseFX (Singlemode, SC style connector, 40Km) , DIN-Rail, Dual Power Input 90-264VDC, -40°C to +85°C
405FXE-ST-40-HV	5-Port Industrial Unmanaged Ethernet Switch, 4 RJ45 10/100BaseT(X), 1 100BaseFX (Singlemode, ST style connector, 40Km) , DIN-Rail, Dual Power Input 90-264VDC, -40°C to +85°C
405FXE-SC-100-HV	5-Port Industrial Unmanaged Ethernet Switch, 4 RJ45 10/100BaseT(X), 1 100BaseFX (Singlemode, SC style connector, 100Km) , DIN-Rail, Dual Power Input 90-264VDC, -40°C to +85°C
405FXE-ST-100-HV	5-Port Industrial Unmanaged Ethernet Switch, 4 RJ45 10/100BaseT(X), 1 100BaseFX (Singlemode, ST style connector, 100Km) , DIN-Rail, Dual Power Input 90-264VDC, -40°C to +85°C

 Specifications

Technology		
Standard	IEEE802.3, IEEE802.3u, IEEE802.3x	
Switch Technology	Store and Forwarding Technology with non-blocking	
Number of MAC Address	1K	
Packet Buffer Memory	0.5 MB	
Backplane bandwidth	1.2 Gbps	
Forwarding rate	148810pps	
Interface		
Ethernet Port	4 x 10/100BaseT(x)RJ-45 , 1 x 100Base FX, Auto Negotiation	
System LED	1 x Power: Green On ; 1 x Fiber Optic Indicator: Green On	
Ethernet Port LED	Link (Green On), Active (Green Blinking)	
Power Input	3-Pin Removable Terminal Connector for DC version 6-Pin Removable Terminal Connector for AC & HVDC version	
Power Requirement		
Input Voltage	12/24/48VDC (10~50VDC) 110/220VAC(90~264VAC) or 110/220VDC(90~264VDC) , Redundant	
Reverse Polarity Protect	Yes	
Power Consumption	200mA@24V 10 W	
Mechanical		
Enclosure Material	Metal	
Dimension	37 mm x 150 mm x 100 mm (W x H x D) without DIN Rail Clip for DC version 47.6 mm x 150 mm x 100 mm (W x H x D) without DIN Rail Clip for AC & HVDC version	
Ingress Protection	IP40	
Weight	850 g for DC version 650 g for AC & HVDC version	
Installation method	DIN Rail-mounted/wall-mounted	
Environmental		
Operating Temperature & Humidity	-40°C ~ +85°C , 0%~95% Non- Condensing	
Storage Temperature	-40°C ~ +85°C	
MTBF	>2,000,000 hours	
Warranty	5 years	
Standard		
EMI	FCC Part 15 Subpart B class A, EN55022 class A	
EMS	IEC(EN)61000-4-2(ESD) IEC(EN)61000-4-3(RS) IEC(EN)61000-4-4(EFT) IEC(EN)61000-4-5(Surge) IEC(EN)61000-4-6(CS) IEC(EN)61000-4-8 IEC 60068-2-27(Shock)	
100Base FX		
Multi Mode	AVC-SFP-FX-SX (550m)	Wavelength: 850 nm
	AVC-SFP-FX-S (2km)	Wavelength: 1310 nm
Single Mode	AVC-SFP-FX-10 (10km)	Wavelength: 1310 nm

Function interface

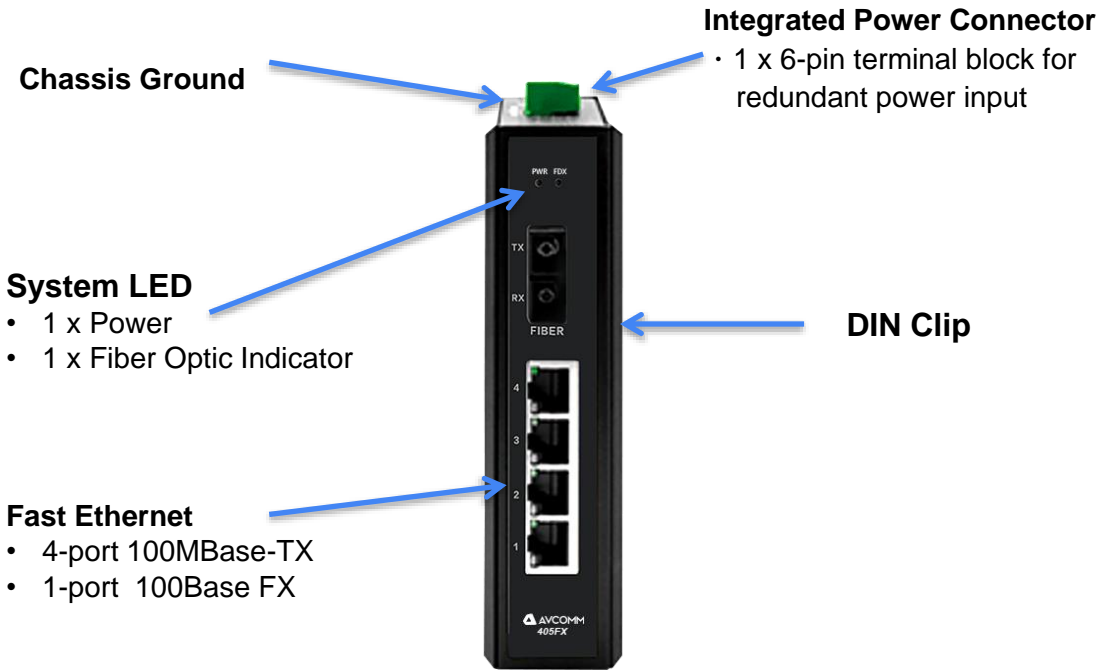

Installation dimensions

